



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T4S R8W

SEC 11 | SEC 12  
SEC 14 | SEC 13

U.S.B.&M.


R-21



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 62°53'28" W	13.92'
L2	N 52°02'05" E	13.96'
L3	S 45°13'53" E	9.27'
L4	N 53°58'41" E	26.09'

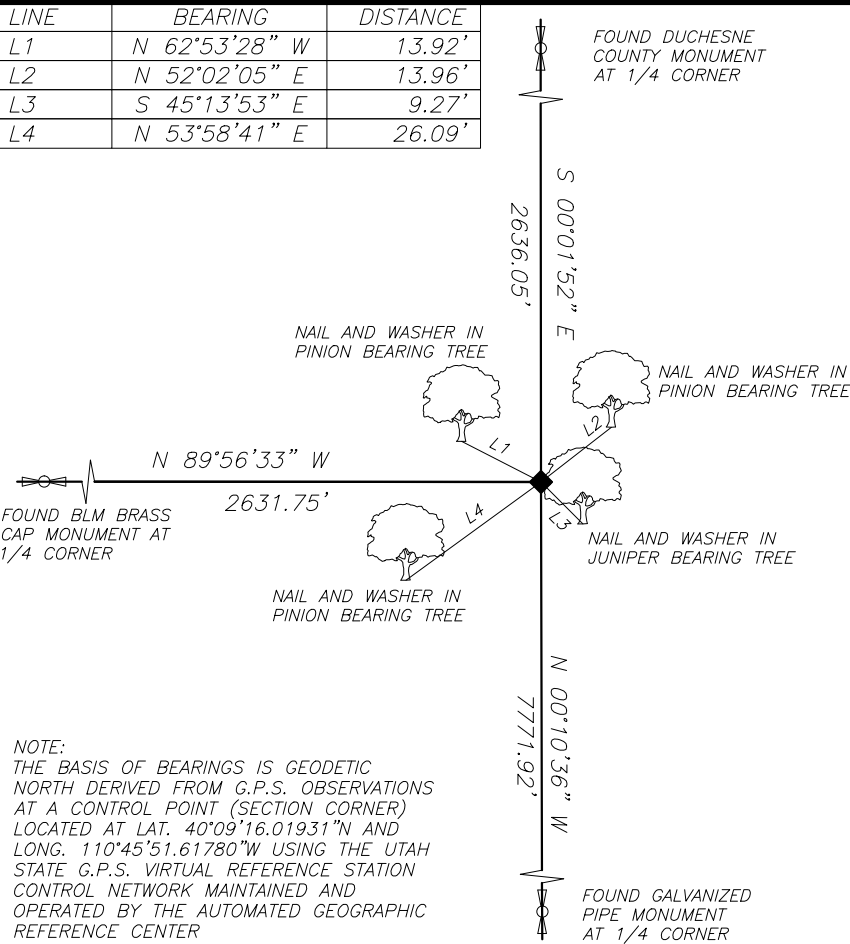

NOTE:  
THE BASIS OF BEARINGS IS GEODETIC  
NORTH DERIVED FROM G.P.S. OBSERVATIONS  
AT A CONTROL POINT (SECTION CORNER)  
LOCATED AT LAT. 40°09'16.01931"N AND  
LONG. 110°45'51.61780"W USING THE UTAH  
STATE G.P.S. VIRTUAL REFERENCE STATION  
CONTROL NETWORK MAINTAINED AND  
OPERATED BY THE AUTOMATED GEOGRAPHIC  
REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND B.L.M. BRASS CAP AND PIPE MONUMENT  
AT POSITION OF SECTION CORNER

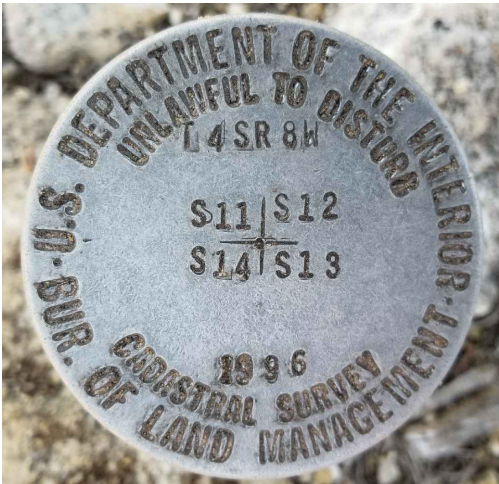


PHOTO OF MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES  
ESTABLISHED TO PERPETUATE THE ORIGINAL  
LOCATION OF THE CORNER

REFERENCED AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7220538.965  
E: 1851373.310  
NAVD88 EL: 6572.12'

LATITUDE: 40°08'23.30296" N  
LONGITUDE: 110°44'43.46202" W  
ELLIPSOID HEIGHT: 6518.564'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300040S0080W0\_600500



PHOTO OF MONUMENT FACING WEST

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do  
hereby certify that I have performed or reviewed the work done on the  
diagrammed corner as reported on this recordation form and approve same

Date 22 MAY '19

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

